


Configuration du modem routeur PIRELLI A1010

Client professionnel et IP fixe


- Accédez à l'interface du routeur via l'adresse **192.168.1.1**



- Saisissez « **topadmin** » comme login et mot de passe puis cliquer sur « **OK** ».

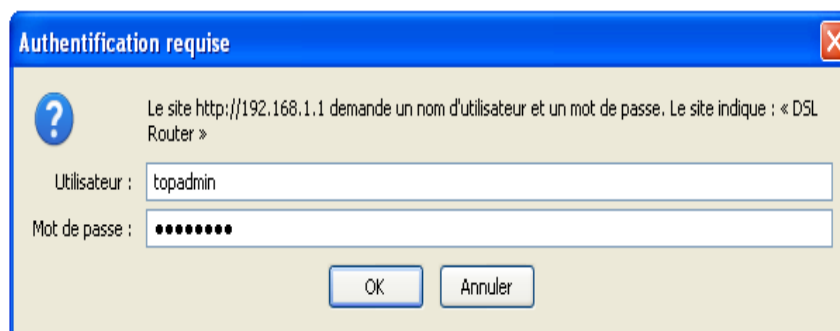

- Cliquez sur « **Advanced Setup** » puis « **Edit** ».

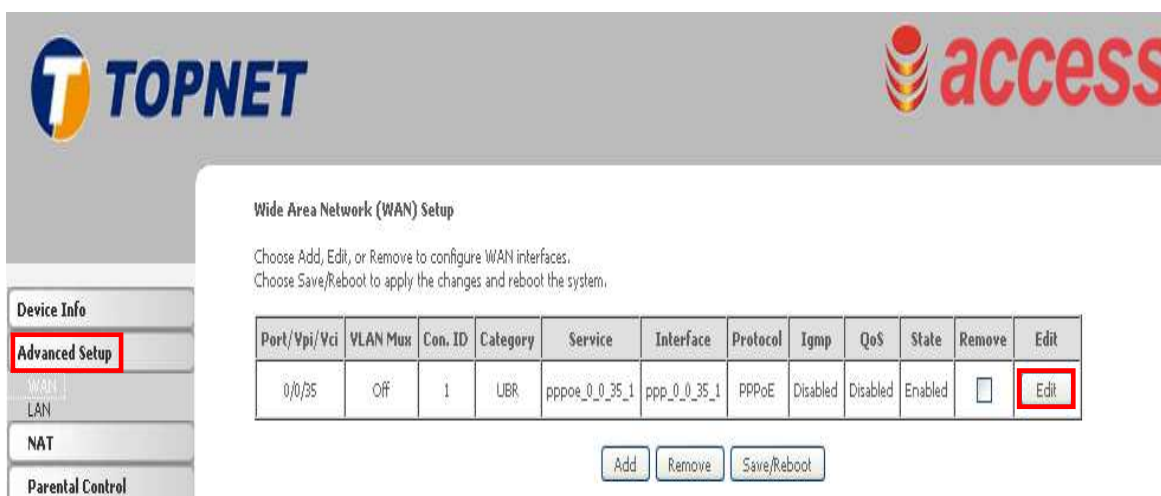

Wide Area Network (WAN) Setup

Choose Add, Edit, or Remove to configure WAN interfaces.
Choose Save/Reboot to apply the changes and reboot the system.

Port/Vpi/Vci	VLAN Mux	Con. ID	Category	Service	Interface	Protocol	Igmp	QoS	State	Remove	Edit
0/0/35	Off	1	UBR	pppoe_0_0_35_1	ppp_0_0_35_1	PPPoE	Disabled	Disabled	Enabled	<input type="checkbox"/>	Edit

Add Remove Save/Reboot

- Saisissez le couple **VPI/VCI (0,35)** puis cliquez sur « **Next** ».

ATM PVC Configuration

This screen allows you to configure an ATM PVC identifier (PORT and VPI and VCI) and select a service checkbox to enable it.

VPI: [0-255]	0
VCI: [32-65535]	35

VLAN Mux - Enable Multiple Protocols Over a Single PVC


Service Category: UBR Without PCR

Enable Quality Of Service

Enabling packet level QoS for a PVC improves performance for selected classes of applications. QoS resources; therefore the number of PVCs will be reduced. Use **Advanced Setup/Quality of Service**

Enable Quality Of Service

- Cochez « **PPP over Ethernet (PPPoE)** », sélectionnez « **LLC/SNAP-BRIDGING** » puis cliquez sur « **Next** ».

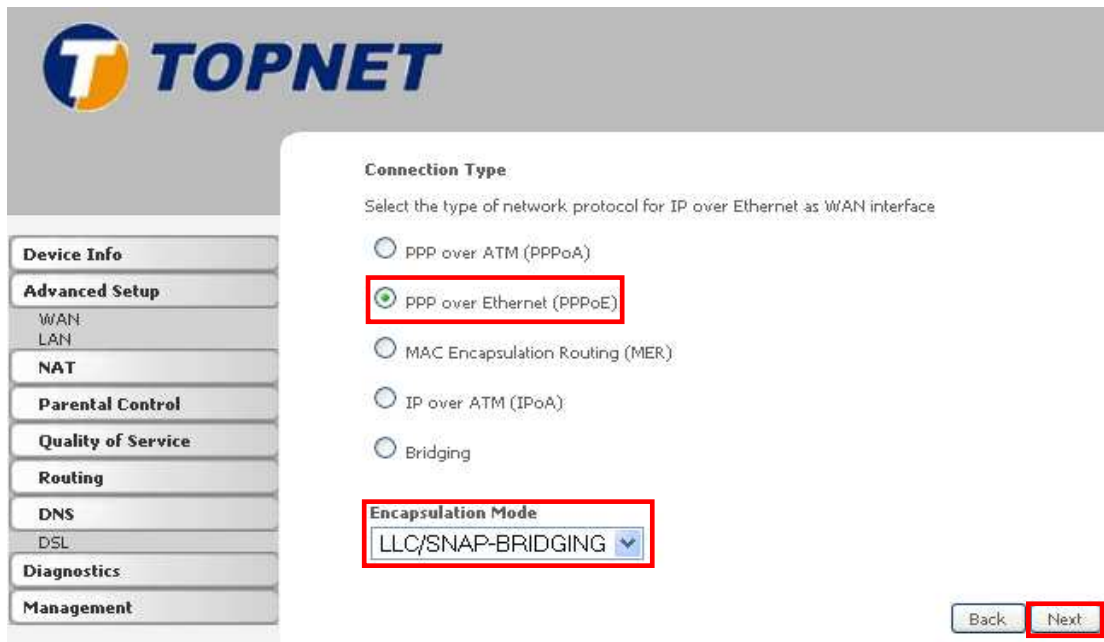


The screenshot shows the TOPNET configuration interface. On the left is a sidebar with menu items: Device Info, Advanced Setup (selected), WAN, LAN, NAT, Parental Control, Quality of Service, Routing, DNS, DSL, Diagnostics, and Management. The main content area is titled "Connection Type" and contains the instruction "Select the type of network protocol for IP over Ethernet as WAN interface". There are five radio button options: "PPP over ATM (PPPoA)", "PPP over Ethernet (PPPoE)" (which is selected and highlighted with a red box), "MAC Encapsulation Routing (MER)", "IP over ATM (IPoA)", and "Bridging". Below this is the "Encapsulation Mode" section with a dropdown menu set to "LLC/SNAP-BRIDGING" (also highlighted with a red box). At the bottom right, there are "Back" and "Next" buttons, with the "Next" button highlighted by a red box.

- Saisissez votre **login de connexion ADSL** dans le champ « **PPP Username** » et sélectionnez « **topnet.com** ».
- Entrez votre **mot de passe de connexion ADSL** dans le champ « **PPP Password** ».
- Cochez la case « **Enable Fullcone NAT** ».
- Cochez la case « **Retry PPP password on authentication error** » puis cliquez sur « **Next** ».


PPP Username and Password

PPP usually requires that you have a user name and password to establish your connection. In th provided to you.

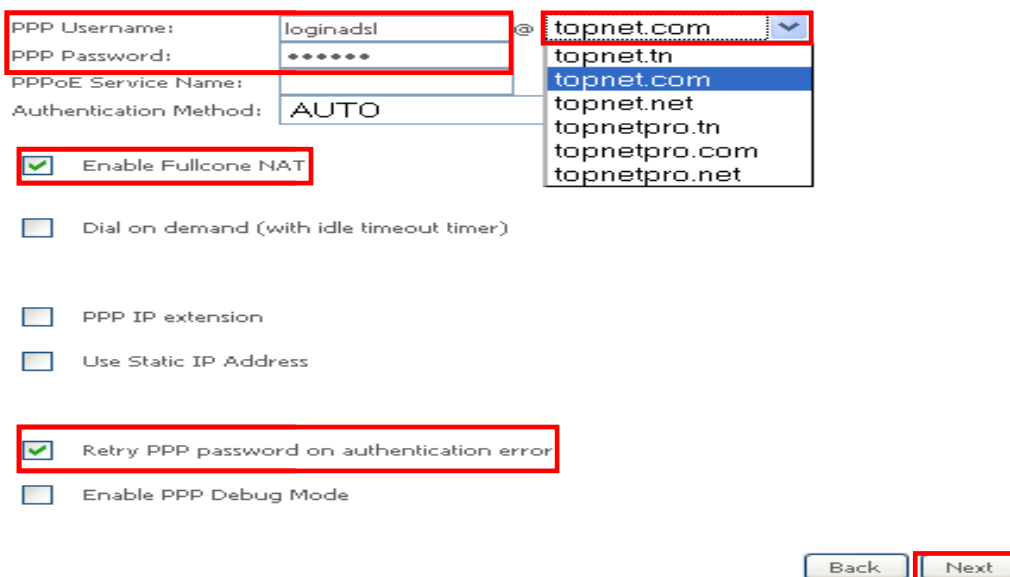

The screenshot shows a configuration page for PPP. The 'PPP Username' field contains 'loginadsl' and the domain dropdown is set to 'topnet.com'. The 'PPP Password' field is masked with dots. The 'Authentication Method' is set to 'AUTO'. The 'Enable Fullcone NAT' checkbox is checked. The 'Retry PPP password on authentication error' checkbox is also checked. At the bottom right, there are 'Back' and 'Next' buttons.

- Cliquez sur « **Next** ».

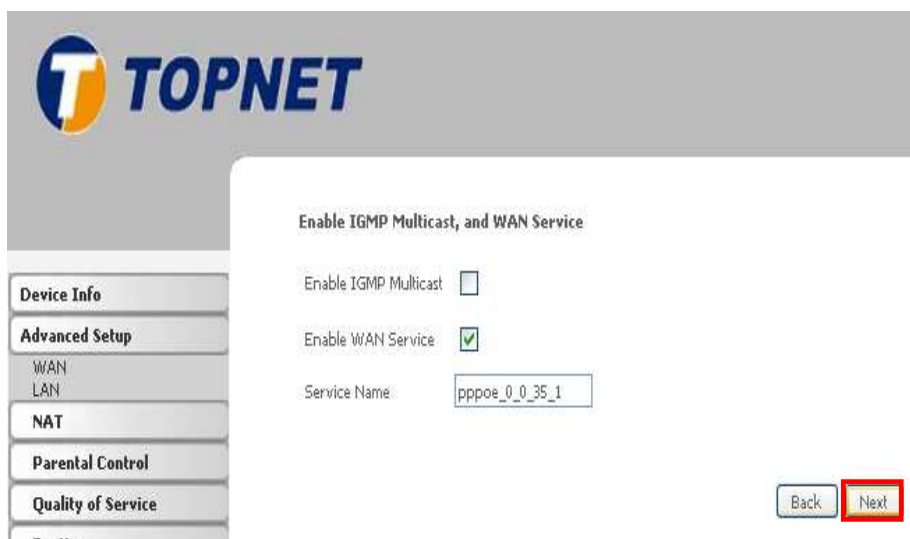

The screenshot shows a configuration page for WAN Service. The 'Enable WAN Service' checkbox is checked. The 'Service Name' field contains 'pppoe_0_0_35_1'. At the bottom right, there are 'Back' and 'Next' buttons.

- Cliquez sur « **Save** ».

WAN Setup - Summary

Make sure that the settings below match the settings provided by your ISP.

PORT / VPI / VCI:	0 / 0 / 35
Connection Type:	PPPoE
Service Name:	pppoe_0_0_35_1
Service Category:	UBR
IP Address:	Automatically Assigned
Service State:	Enabled
NAT:	Enabled
Firewall:	Disabled
IGMP Multicast:	Disabled
Quality Of Service:	Disabled

Click "Save" to save these settings. Click "Back" to make any modifications.

NOTE: You need to reboot to activate this WAN interface and further configure services over this interface.

Back Save

- Cliquez sur « **Save/Reboot** » pour enregistrer la configuration effectuée.

Wide Area Network (WAN) Setup

Choose Add, Edit, or Remove to configure WAN interfaces.

Choose Save/Reboot to apply the changes and reboot the system.

Port/Vpi/Vci	VLAN Mux	Con. ID	Category	Service	Interface	Protocol	Igmp	QoS	State	Remove	Edit
0/0/35	Off	1	UBR	pppoe_0_0_35_1	ppp_0_0_35_1	PPPoE	Disabled	Disabled	Enabled	<input type="checkbox"/>	Edit

Add Remove Save/Reboot