



Configuration du modem routeur Pirelli A124G

Client particulier

- Accédez à l'interface du routeur via l'adresse **192.168.1.254**




- Saisissez « **topadmin** » comme login et mot de passe puis cliquez sur « **OK** ».

Username:

Password:

- Cliquez sur « **WAN** » dans le menu de gauche.

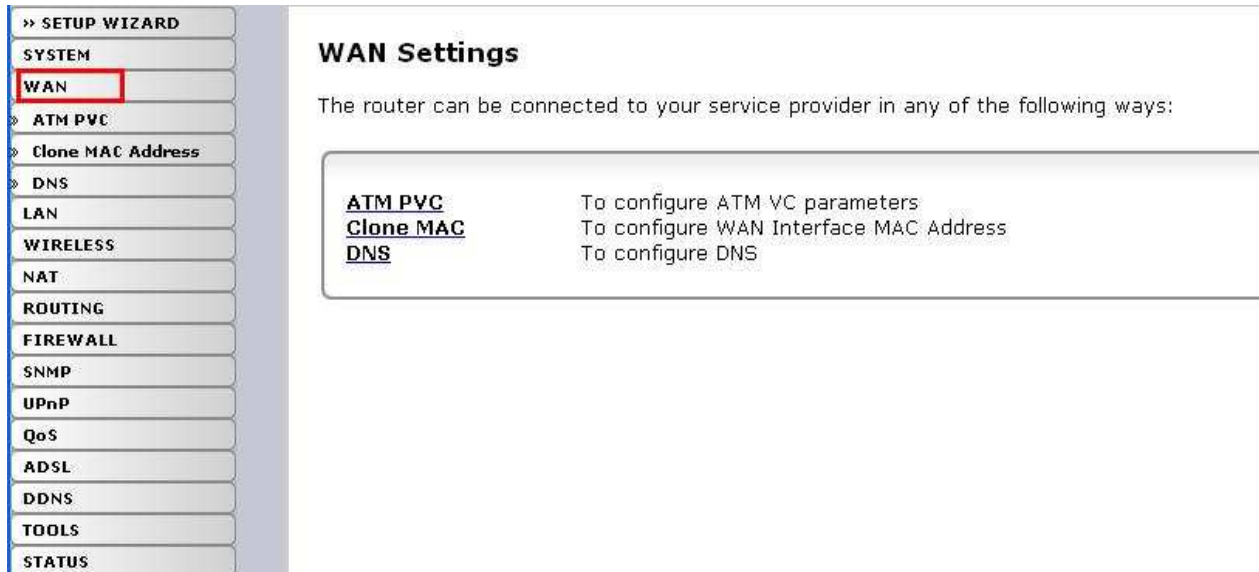A screenshot of a router's web interface. On the left is a vertical menu with various configuration options. The 'WAN' option is highlighted with a red rectangular box. The main content area is titled 'WAN Settings' and contains a paragraph of text followed by a table of configuration options.

WAN Settings	
The router can be connected to your service provider in any of the following ways:	
<u>ATM PVC</u>	To configure ATM VC parameters
<u>Clone MAC</u>	To configure WAN Interface MAC Address
<u>DNS</u>	To configure DNS

- Cliquez sur « **ATM PVC** ».

- >> SETUP WIZARD
- SYSTEM
- WAN
- » **ATM PVC**
- » Clone MAC Address
- » DNS
- LAN
- WIRELESS
- NAT
- ROUTING
- FIREWALL
- SNMP
- UPnP
- QoS
- ADSL
- DDNS
- TOOLS
- STATUS

WAN Settings

The router can be connected to your service provider in any of the following ways:

ATM PVC	To configure ATM VC parameters
Clone MAC	To configure WAN Interface MAC Address
DNS	To configure DNS

- Cliquez sur « **VC1** ».

ATM PVC

ADSL router uses ATM as its layer 2 protocol. ATM PVC is a virtual connection which acts as a WAN interface. The Gateway supports up to 8 ATM PVCs.

Description	VPI/VCI	Encapsulation	Protocol
VC1	0/35	LLC	PPPoE
VC2	-/-	---	---
VC3	-/-	---	---
VC4	-/-	---	---
VC5	-/-	---	---
VC6	-/-	---	---
VC7	-/-	---	---
VC8	-/-	---	---

- Saisissez le couple **VPI/VCI (0,35)**
- Saisissez votre login de connexion ADSL dans le champ « **Username** » et sélectionnez « **topnet.tn** ».
- Entrez votre mot de passe de connexion ADSL dans le champ « **Password** » et « **confirm Password** ».
- Saisissez **0** dans le champ « **VLAN IDx** ».
- Cliquez sur « **Save SETTINGS** » pour enregistrer la configuration effectuée.


ATM Interface

ATM1	
Protocol	PPPoE
VPI/VCI	0 / 35
Encapsulation	LLC
QoS Class	UBR
PCR/SCR/MBS	4000 / 4000 / 10
IP assigned by ISP	Yes
IP Address	0.0.0.0
Subnet Mask	0.0.0.0
Connection Type	Always Connected
Idle Time	20 (minutes)
Authentication Protocol	AUTO
Connection Retry Timer	3 (seconds)
Keepalive Timer	15 (seconds)
Username	user topnet.tn
Password	*****
Confirm Password	*****
MTU	1492
VLAN IDx	0 (0-65535)

HELP SAVE SETTINGS CANCEL



- Patientez durant l'enregistrement des informations sur le routeur.

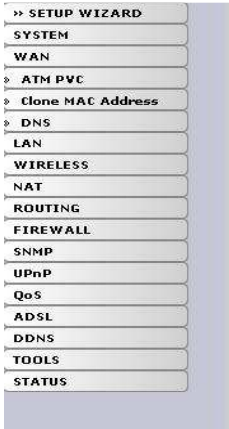

Your data is being saved