

Configuration du modem routeur SAGEM F@st 1201 V2 version 3.51r14GL_TOPNET


Client particulier réseau IP et IP MSAN

Pour configurer le Sagem F@st 1201 V2, il faut :


- Accédez à l'interface du routeur via l'adresse **192.168.1.1**



- Saisissez « **admin** » comme login et mot de passe puis cliquez sur « **OK** ».

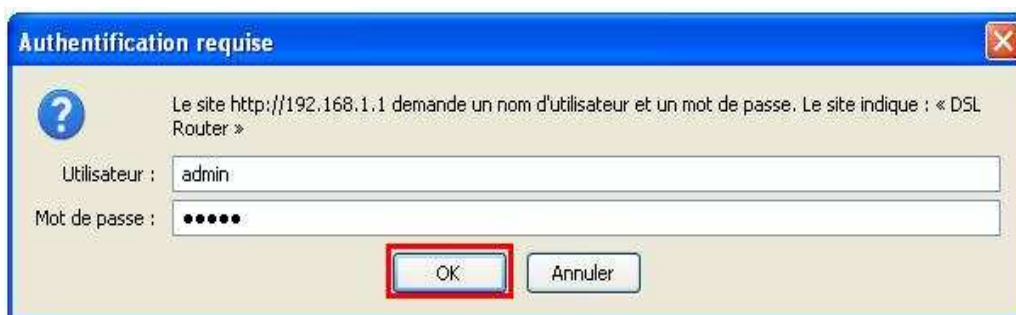

- Cliquez sur **Internet Connexion**, saisissez les **paramètres de connexion ADSL** puis cliquez sur **Save/Apply**.

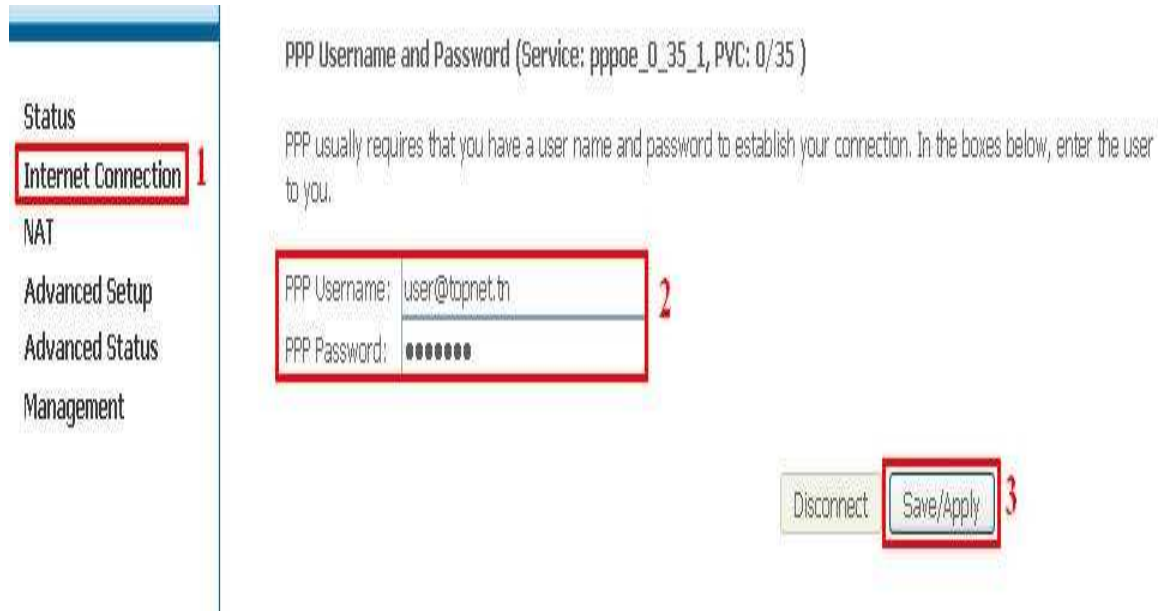

The screenshot shows a web interface for configuring an Internet connection. On the left is a navigation menu with the following items: Status, Internet Connection (highlighted with a red box and a red '1'), NAT, Advanced Setup, Advanced Status, and Management. The main content area is titled "PPP Username and Password (Service: pppoe_0_35_1, PVC: 0/35)". Below the title is a text box containing the instruction: "PPP usually requires that you have a user name and password to establish your connection. In the boxes below, enter the user to you." There are two input fields: "PPP Username:" with the value "user@topnet.tn" and "PPP Password:" with a masked password of eight dots. Both input fields are enclosed in a red box with a red '2'. At the bottom right of the form are two buttons: "Disconnect" and "Save/Apply". The "Save/Apply" button is highlighted with a red box and a red '3'.