


Configuration du Sagem 2404 (IP MSAN)

- Accédez à l'interface du modem via l'adresse **192.168.1.1** et saisissez « **admin** » comme nom d'utilisateur et mot de passe.

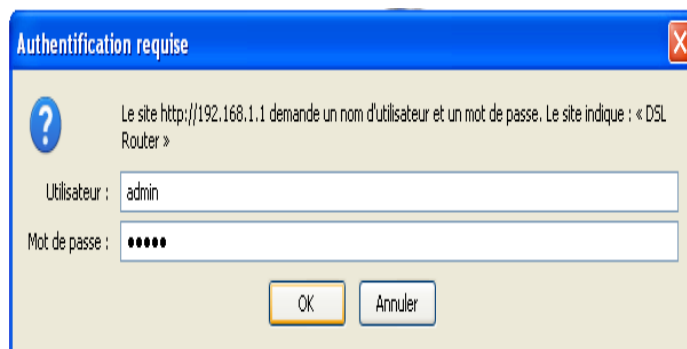

Authentication requise


Le site http://192.168.1.1 demande un nom d'utilisateur et un mot de passe. Le site indique : « DSL Router »

Utilisateur : admin

Mot de passe : •••••

OK Annuler

- Cliquez sur « **Advanced Setup** » puis « **Edit** ».

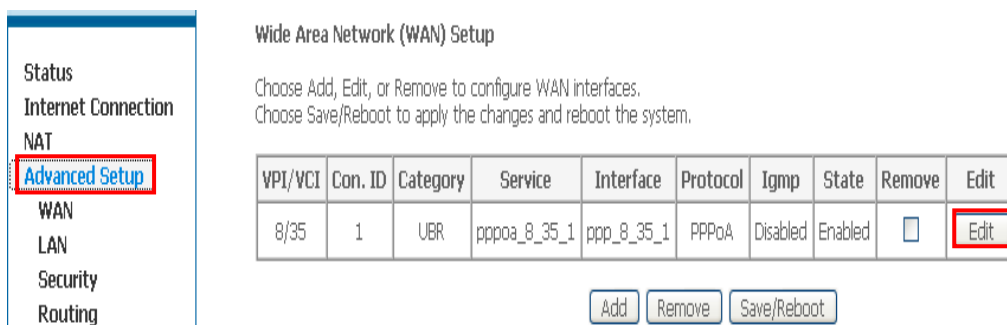

Wide Area Network (WAN) Setup

Choose Add, Edit, or Remove to configure WAN interfaces.
Choose Save/Reboot to apply the changes and reboot the system.

VPI/VCI	Con. ID	Category	Service	Interface	Protocol	Igmp	State	Remove	Edit
8/35	1	UBR	pppoa_8_35_1	ppp_8_35_1	PPPoA	Disabled	Enabled	<input type="checkbox"/>	<input type="button" value="Edit"/>

Add Remove Save/Reboot

- Saisissez dans les champs « **VPI=0** » et « **VCI=35** » puis cliquez sur « **Next** ».

ATM PVC Configuration

This screen allows you to configure an ATM PVC identifier (VPI and VCI) and select a service category. Otherwise choose an existing interface by selecting the checkbox to enable it.

VPI: [0-255]	0
VCI: [32-65535]	35

Service Category: UBR Without PCR

Back Next

- Cochez la case « **PPP over Ethernet (PPPoE)** » et sélectionnez « **LLC/SNAP-BRIDGING** ».
- Cochez par la suite « **Enable 802.1q** » et saisissez « **410** » dans le champ « **VLAN IP [0-4095]** » puis cliquez sur « **Next** ».

Connection Type

Select the type of network protocol and encapsulation mode over the ATM PVC. 802.1q VLAN tagging is only available for PPPoE, MER and Bridging.

- PPP over ATM (PPPoA)
- PPP over Ethernet (PPPoE)
- MAC Encapsulation Routing (MER)
- IP over ATM (IPoA)
- Bridging

Encapsulation Mode
LLC/SNAP-BRIDGING

Enable 802.1q
VLAN ID[0-4095]: 410

Back Next

- Saisissez votre **Login** et **Mot de Passe de connexion ADSL** puis cliquer sur « **Next** ».

PPP Username and Password

PPP usually requires that you have a user name and password to establish your connection. You must enter a user name and password that your ISP has provided to you.

PPP Username:	<input type="text" value="hot@topnet.tn"/>
PPP Password:	<input type="password" value="*****"/>
PPPoE Service Name:	<input type="text"/>
Authentication Method:	<input type="text" value="AUTO"/>

Dial on demand (with idle timeout timer)

PPP IP extension

Use Static IP Address

Configure PPP MTU

Enable PPP Debug Mode

- Cliquez sur « **Next** »

Status
Internet Connection
NAT
Advanced Setup
WAN
LAN
Security
Routing
DNS
DSL

Enable IGMP Multicast, and WAN Service

Enable IGMP Multicast

Enable WAN Service

Service Name

- Cliquez sur « **Save** ».

Status

Internet Connection

Wireless

NAT

Advanced Setup

WAN

LAN

Security

Routing

DNS

DSL

Port Mapping

Certificate

Advanced Status

Management

WAN Setup - Summary

Make sure that the settings below match the settings provided by your ISP.

VPI / VCI:	0 / 35
Connection Type:	PPPoE
Service Name:	FF
Service Category:	UBR
IP Address:	Automatically Assigned
Service State:	Enabled
NAT:	Enabled
Firewall:	Enabled
IGMP Multicast:	Disabled

Click "Save" to save these settings. Click "Back" to make any modifications.
NOTE: You need to reboot to activate this WAN interface and further configure :

- Cliquez sur « **Save/Reboot** » pour enregistrer la configuration effectuée.

Wide Area Network (WAN) Setup

Choose Add, Edit, or Remove to configure WAN interfaces.
Choose Save/Reboot to apply the changes and reboot the system.

VPI/VCI	VLAN Mux	Con. ID	Category	Service	Interface	Protocol	IGMP	QoS	State	Remove	Edit
0/35	410	1	UBR	FF	ppp_0_35_1	PPPoE	Disabled	Disabled	Enabled	<input type="button" value="Remove"/>	<input type="button" value="Edit"/>