



## Changement d'adresse IP du modem routeur Pirelli A124G

- accédez à l'interface du routeur via l'adresse **192.168.1.254** et tapez « **topadmin** » comme Login et Mot de passe.

Username:

Password:

- Cliquer sur "LAN".


**Status**

You can use the Status screen to see the connection status for the router's WAN/LAN interfaces, firmware and hardware version numbers, any illegal attempts to access your network, as well as information on all DHCP client PCs currently connected to your network.

Current Time: 08/01/2003 11:14:45 pm

<b>INTERNET</b> ADSL: DISCONNECTED	<b>GATEWAY</b> IP Address: 192.168.1.254 Subnet Mask: 255.255.255.0 DHCP Server: Enabled Firewall: Disabled UPnP: Disabled Wireless: Enabled	<b>INFORMATION</b> Numbers of DHCP Clients: 1 Runtime Code Version: 1.05-TOP_TR069_AnnexM (Nov 27 2009 20:27:42) Boot Code Version: V0.02.00 ADSL Modem Code Version: 3.3.3.5.1.1A LAN MAC Address: 00-25-53-14-A1-B0 WAN MAC Address: 00-25-53-14-A1-B1 Wireless MAC Address: 00-25-53-14-A1-B0 Hardware Version: 01
---------------------------------------	--	---

- Saisissez l'adresse IP voulue dans le champ "IP Address" puis saisissez le champ "Start IP" et "End IP".

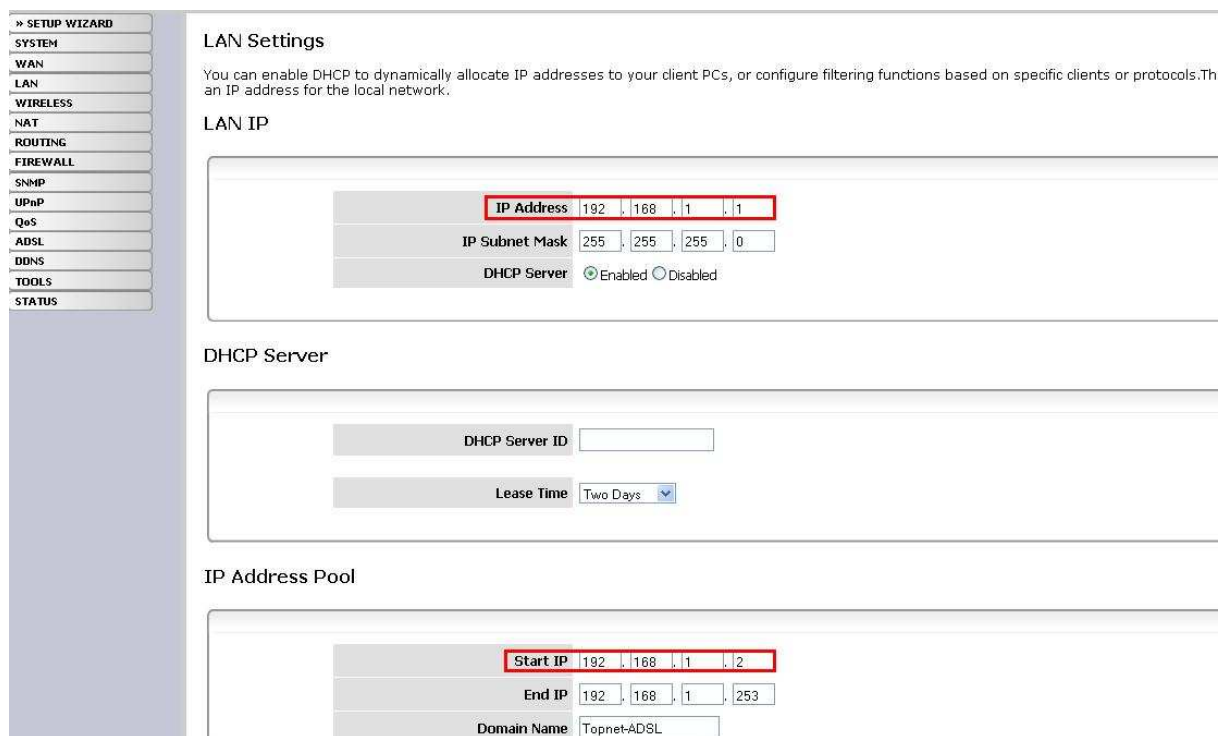

» SETUP WIZARD  
SYSTEM  
WAN  
LAN  
WIRELESS  
NAT  
ROUTING  
FIREWALL  
SNMP  
UPnP  
QoS  
ADSL  
DDNS  
TOOLS  
STATUS

### LAN Settings

You can enable DHCP to dynamically allocate IP addresses to your client PCs, or configure filtering functions based on specific clients or protocols. Then an IP address for the local network.

#### LAN IP

IP Address	192	168	1	1
IP Subnet Mask	255	255	255	0
DHCP Server	<input checked="" type="radio"/> Enabled <input type="radio"/> Disabled			

#### DHCP Server

DHCP Server ID	
Lease Time	Two Days

#### IP Address Pool

Start IP	192	168	1	2
End IP	192	168	1	253
Domain Name	Topnet-ADSL			

- Cliquez sur "OK" pour confirmer.





- Maintenant, cliquez sur “Ok”, redémarrez le modem puis retapez la nouvelle adresse du modem.

