


Activation d'IPv6 sur 'ONT GPON TPLINK Archer xr 500




1. Accédez à l'interface du modem via l'adresse <http://192.168.1.1>



2. Saisissez « **topadmin** » comme Utilisateur et Mot de passe puis cliquez sur « **Log in** »

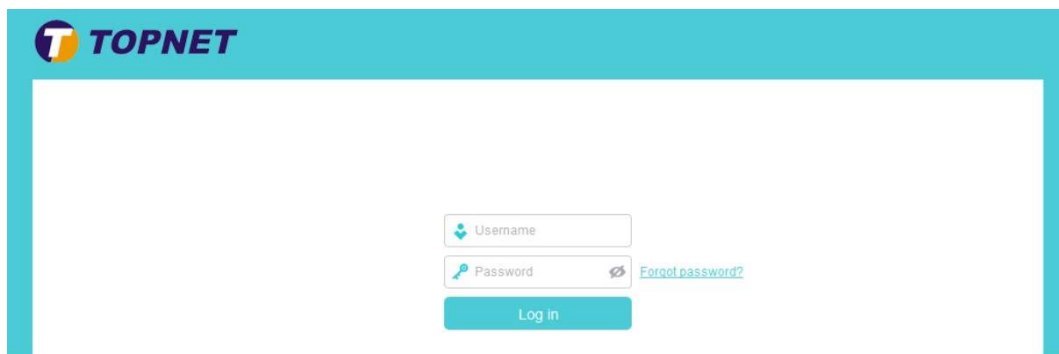

3. Choisissez la rubrique « **> Advanced > Internet** »
Cliquez sur l'icône de "stylot" à droite

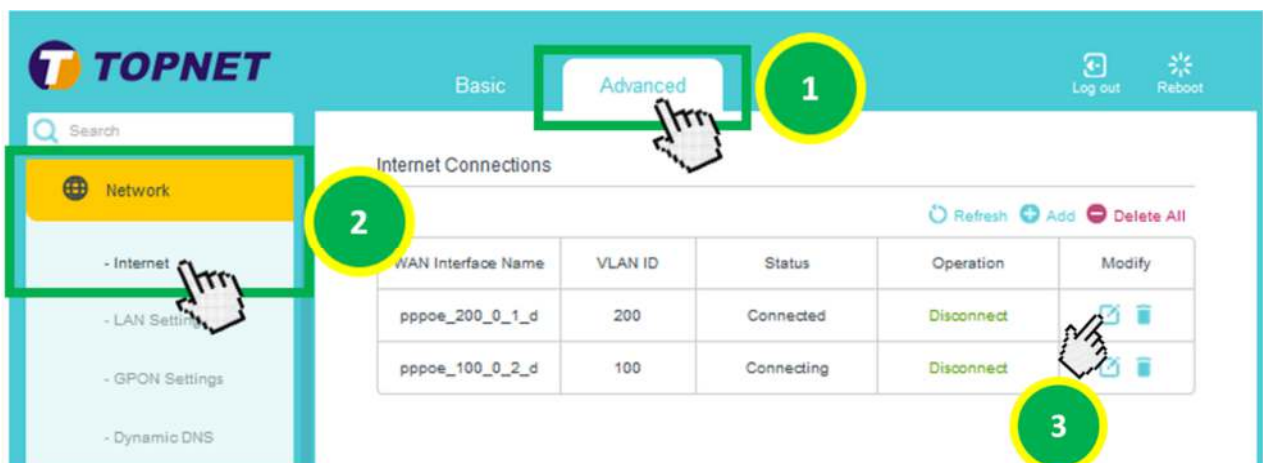

4. Ensuite,

- 1> Cochez la case IPv6,
- 2> Selectionnez > Adressing Type “SLAAC”
- 3> Validez ensuite la configuration, en cliquant sur “Save”

The screenshot displays the TOPNET web interface for network configuration. The 'Advanced' tab is selected, showing the following settings:

- VLAN ID(0-4094): 200
- Priority(0-7): 0
- Multicast VLAN (0-4094): 0
- Connection Type: PPPoE
- Username: [masked] @ topnet
- Password: [masked]
- Confirm Password: [masked]
- Connection Mode: Auto On Demand Manually
- Authentication Type: Auto
- IPv4: Enable
- Default Gateway: pppoe_200_0_1_d
- IPv6: Enable
- Addressing Type: SLAAC
- IPv6 Default Gateway: pppoe_200_0_1_d

At the bottom right, the 'Save' button is highlighted with a green box and a hand cursor. The footer of the page contains the following information:

Firmware Version: 1.1.0 0.8.0 v5009.0 Build 200709 Rel.52653n_Beta Hardware Version: Archer XR500v v1 00000000 [Support](#)

Fin